


text phone 02920 099 098

## 2kw / 2000W Electric Panel Heater Wall Mounted - LOT20/ERP Compliant C/w 2b.co.uk/ 24/7 Timer / Thermostat - Wall Hung Fixings + Mounting Feet

ONLINE B2B .co.uk

£89.90

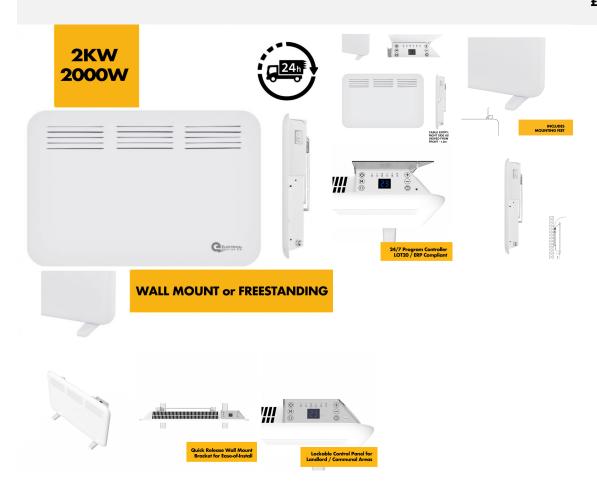



**ENERGY SAVING MODE** 







(°)	<del>Ų</del> Ø	•	$\overline{\mathbb{Q}}$
RAPID HEAT UP UNDER 6 SECONDS	LOT 20 / ERP COMPLIANT	ECO/COMFORT/ANTI-FROST MODE & OPEN WINDOW SENSOR	24/7 PROGRAMMABLE THERMOSTAT
\$	<b>③</b>	Ø	$\odot$
IPX4 RATING	EASY INSTALL	SILENT OPERATION (NO FAN)	OVERHEAT SAFETY PROTECTION





100% powder-coated steel body, ideal for both home or office


Optional mounting feet for freestanding use





Supplied complete with wall mount bracket & screws



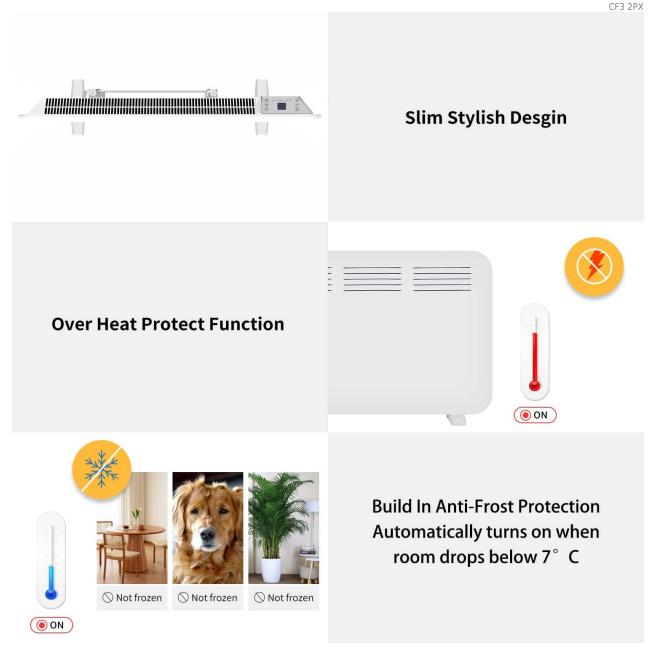

- -[RANGE OF SIZES] 1kw (1000W) / 1.5kw (1500W) / 2kw (2000W) Electric Panel Heater Radiator suits rooms of all sizes from  $5 25m^2$
- **[WALL MOUNT OR FREESTANDING]** Electric panel heater supplied complete with wall mount bracket & screws (must be 300mm/30cm clearance around all sides) as well as optional mounting feet for freestanding use
- [LOT20 & ERP COMPLIANT] 100% efficient as 100% of electrical energy is converted to heat Complies with modern UK & European energy efficiency building regulations suitable for new build radiator applications electric convector heating in rooms such as living room bedroom, hallway etc.
- [BUILT IN 24/7 TIMER & THERMOSTAT] Easy to use, built in electronic 24/7 timer with thermostat to enable programming for keeping ambient / optimum temperature in all rooms as well as reducing energy wastage panel heaters thermostat accurately monitors ambient temperature and automatically turns on/off heater when required for optimum energy saving controls
- [BUILT IN SAFETY FEATURES] IP24 rated, ideal for use in all internal spaces as well as certain zones in a bathroom (professional installer to confirm which areas & safe distances) & Open window detection detects large drops in ambient temperature and will reactively pause the system. It will then reset and resume activity once the temperature has stabilised.



[REGISTERED OFFICE ONLY]

The Levels

Capital Business Park

Cardiff

CF3 2PX

This drastically decreases energy wastage and improves heater's efficiency and money-saving capabilitiest\_phone 02920 099 098
sales@onlineb2b.co.uk | https://onlineb2b.co.uk/

DOWNLOAD PRODUCT INSTRUCTIONS / MANUAL

**DOWNLOAD TECHNICAL PDF SPEC SHEET** 

## Dimensions (including wall brackets) and Coverage:

500W / 0.5kw: Height 350mm x Length 455mm x Depth 100mm - ideal for rooms  $6-8m^2$ 

1000W / 1KW: Height 430mm x Length 515mm x Depth 100mm - ideal for rooms 8-10m<sup>2</sup>

1500W / 1.5KW: Height 430mm x Length 645mm x Depth 100mm - ideal for rooms 12-15m<sup>2</sup>

2000W / 2KW: Height 430mm x Length 815mm x Depth 100mm - ideal for rooms >20m<sup>2</sup>

Feet are 280mm long - hence depth becomes 280mm / 28cm when using optional mounting feet. Gap / Stand off from wall 30mm when using mounting bracket, ie front of heater measures 130mm/13cm from the wall/mounting surface when wall mounted.

220-240V AC 50-60Hz, c/w 3Pin UK 10A Fused plug - cable 1.2m long, exits the rear bottom right hand side of the heater as viewed from the front