

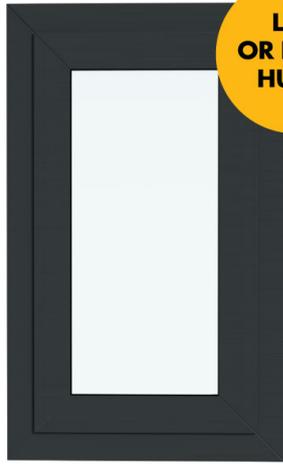


UPVC Window Anthracite Grey - Single 610mm w x 1040mm h (RAL7016) Left or Right Opening 1P

£173.40



LEFT OR RIGHT HUNG



*70MM GL OPTIONAL - CHECK DIMENSIONS BOTH WITH & WITHOUT GL BEFORE ORDERING




GREY-ON-WHITE
ANTHRACITE GREY EXTERIOR
PURE WHITE INTERIOR



Optional 150mm CI

*please check dimensions with & without gl carefully before ordering


610mm w x 1040mm h




c/w 400mm Trickle Vents



OPTIONAL WINDOW STRAPS FOR EASE OF INSTALL



70MM REINFORCED PROFILE



Other Standard Sizes from Stock

UPVC Window Anthracite Grey on White - Single 610mm w x 1040mm h (RAL7016) - Left or Right Opening Casement Window

Range of Stock Standard Sizes - Same Day Dispatch Range of Stock Standard Sizes - (Single 610mm w x 820mm h (top hung), 610mm w x 1040mm h (side hung), Double: 1190mm w x 1040mm h, Triple: 1770mm w x 1040mm h)

[ANTHRACITE GREY ON WHITE] RAL 7016 anthracite grey exterior with white interior 70mm Internally Beaded uPVC Profile: Slim, strong and insulating profiles combined with high quality glazing to create a thermally efficient window which is robust and easy to maintain. Foiled effect on Anthracite grey side, white internal face smooth finish.

[BOTH RIGHT-HAND & LEFT-HAND SIDE HUNG WINDOWS] Select opening type from options (as viewed from outside) supplied complete with 2-keys & high security lockable aluminium handle (white handle)

[28MM ARGON-FILLED LOW E INSULATED GLASS] A-rated 1.4 W/m²K Thermally efficient. Silver spaces. Clear coat Glass is Toughened to EN12150 for extra strength & security. Glass pre-fitted into frame for transport. Ease of install with side window straps or remove uPVC internal beading to drill through -

Complies with 2022 Building Regulations regarding thermal performance Part L replacement extensions
sales@thisiswholesale.co.uk | https://onlineb2b.co.uk/

[TRICKLE VENTILATION FOR REDUCED CONDENSATION - BUILDING REGS PART F] Supplied with colour coded, openable trickle vents rated at 4000mm² both Internally & externally on the opening pane for passive air-flow in line with building regs Approved Document F. Internal weep wholes as standard to assist rain-water / drainage egress (note - trickle vent holes are routed, but trickle vents require installation with 2 screws)

[STANDARD STOCK SIZE 610MM W X 1040MM H] Popular sizes in both Anthracite Grey or White **from stock for same day dispatch** for a range of domestic window projects & applications. Generally advised to leave a 10mm tolerance in brickwork/aperture for ease of installation. NOTE - optional listed dimensions are window frame ONLY. IF select optional uPVC window cill - add 30mm to the overall height ie. 1010mm frame + 30mm cil = 1040mm total height. If you dont opt for the optional sill, your window frame size will be 1010mm h.

Optional uPVC window cil is cut slightly longer than the width of the window allowing you to cut in during installation. Supplied complete with 1 x pair of end-caps (loose) - can be glued or clipped in after install.

Frame Colour	Anthracite Grey on White (Grey External / White Internal)
Frame Depth	70 mm
Frame Height	1040 mm inc. cil (1010mm without Sill)
Frame Type	70mm uPVC Casement
Frame Width	610mm
Glazing Type	28mm Double Glazed Argon Filled - Toughened EN12150
Handed	Side Hung (Select L or R - as viewed from outside)
Insulation Type	36mm Argon-Filled Insulating Glass
Manufacturer Guarantee	10 Year Manufacturer's Guarantee (T&Cs Apply)
Profile Type	70mm Internally Beaded uPVC Profile
Transparency	Clear (Soft Coat)
U-Value	1.4 W/m ² K
Ventilation Type	Trickle Ventilation 4000mm
Fixing Method	Frame Fix or Straps (select from Add ons)
Cil Type / Size	150mm (optional - select from Add ons)