



UPVC Window Anthracite Grey - Double 1190mm w x 1040mm h (RAL7016) Left or Right Opening 2P


£212.40




LEFT OR RIGHT HUNG

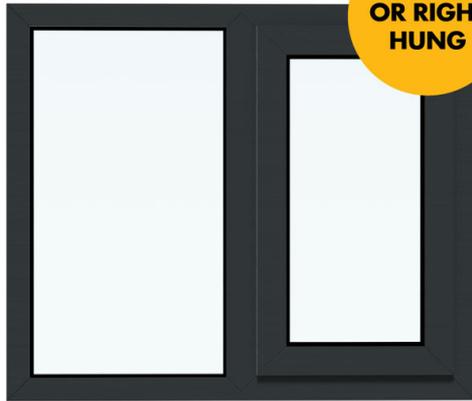

*FRAME & OPTIONAL - CHECK DIMENSIONS WITH WITH & WITHOUT GL, BEFORE ORDERING



c/w 400mm Trickle Vents




1190 w x 1040mm h



Optional 150mm GI




OPTIONAL WINDOW STRAPS FOR EASE OF INSTALL



70MM REINFORCED PROFILE



*please check dimensions with & without of consultancy before ordering



Other Standard Sizes from Stock

UPVC Window Anthracite Grey on White - Double 1190mm (RAL7016) 1190mm w x 1040mm h - Left or Right Opening Casement Window

Range of Stock Standard Sizes - Same Day Dispatch Range of Stock Standard Sizes - (Single 610mm w x 820mm h (top hung), 610mm w x 1040mm h (side hung), Double: 1190mm w x 1040mm h, Triple: 1770mm w x 1040mm h)

[ANTHRACITE GREY ON WHITE] RAL 7016 anthracite grey exterior with white interior 70mm Internally Beaded uPVC Profile: Slim, strong and insulating profiles combined with high quality glazing to create a thermally efficient window which is robust and easy to maintain. Foiled effect on Anthracite grey side, white internal face smooth finish.

[BOTH RIGHT-HAND & LEFT-HAND SIDE HUNG WINDOWS] Select opening type from options (as viewed from outside) supplied complete with 2-keys & high security lockable aluminium handle (white handle)

[28MM ARGON-FILLED LOW E INSULATED GLASS] A-rated 1.4 W/m²K Thermally efficient. Silver spaces. Clear coat Glass is Toughened to EN12150 for extra strength & security. Glass pre-fitted into frame

for transport. Ease of install with side window straps or remove uPVC internal beading to drill through
Complies with 2022 Building Regulations regarding thermal performance Part L replacement & extensions

[TRICKLE VENTILATION FOR REDUCED CONDENSATION - BUILDING REGS PART F] Supplied with colour coded, openable trickle vents rated at 4000mm² both Internally & externally on the opening pane for passive air-flow in line with building regs Approved Document F. Internal weep wholes as standard to assist rain-water / drainage egress (note - trickle vent holes are routed, but trickle vents require installation with 2 screws)

[STANDARD STOCK SIZE 1190MM W X 1040MM H] Popular sizes in both Anthracite Grey or White **from stock for same day dispatch** for a range of domestic window projects & applications. Generally advised to leave a 10mm tolerance in brickwork/aperture for ease of installation. NOTE - optional listed dimensions are window frame ONLY. IF select optional uPVC window cill - add 30mm to the overall height ie. 1040mm frame + 30mm cil = 1070mm total height

Optional uPVC window cil is cut slightly longer than the width of the window allowing you to cut in during installation. Supplied complete with 1 x pair of end-caps (loose) - can be glued or clipped in after install.

Frame Colour	Anthracite Grey on White (Grey External / White Internal)
Frame Depth	70 mm
Frame Height	1040 mm inc. cil (1010mm without Sill)
Frame Type	70mm uPVC Casement
Frame Width	1190mm
Glazing Type	28mm Double Glazed Argon Filled - Toughened EN12150
Handed	Side Hung (Select L or R - as viewed from outside)
Insulation Type	36mm Argon-Filled Insulating Glass
Manufacturer Guarantee	10 Year Manufacturer's Guarantee (T&Cs Apply)
Profile Type	70mm Internally Beaded uPVC Profile
Transparency	Clear (Soft Coat)
U-Value	1.4 W/m ² K
Ventilation Type	Trickle Ventilation 4000mm
Fixing Method	Frame Fix or Straps (select from Add ons)
Cil Type / Size	150mm (optional - select from Add ons)