


**\*\*Custom Sized / Made To Order/measure\*\* Double Steel Security Personnel Pedestrian Door - Industrial Grade Exterior Outdoor Security Door**


**£994.99**



**OPEN IN or OUT  
ACTIVE LEAF LEFT or RIGHT**




Universal - above configuration is RIGHT active leaf Open out  
Marked for Alternative Installation / Direction



FILL ANY GAPS WITH FIBREGLASS WOOL - 1150MM  
CUSTOMISE HEIGHT & WIDTH WITH WIND-LOOSE ADJUSTABLE INFILL / EXPANSION PANELS!



Select your door preference at checkout in the notes (as viewed from outside)




FIXING KITS FOR MASONRY/BRICK/TIMBER OR METAL STEEL FRAME



OPTIONAL WINDOW/LOUVRE VENT



Slotted Vision Panel Window  
Slotted Vision Panel Window  
Louvre Vent



SIDE / TOP EXPANSION INFILL PANELS TO COVER ANY APARTURE SIZE




3 x Dog Leg Security Bolts on Hinge Side for Extra Security




Pre-installed Gaskets on Both Door/Frame Saving Install Time



Pre-installed Fixing Tabs x 4 On Both Sides for Ease of Install



Pre-installed Fixing Tabs x 4 On Both Sides for Ease of Install



50mm Insulation  
1.6 w/m<sup>2</sup>k






**THIS IS A CUSTOM MADE PRODUCT ON A LEAD TIME OF 12-14 WEEKS. IF YOU CANNOT WAIT PLEASE DO NOT ORDER AS ONCE ORDERED, IT IS A NON CANCELLABLE AND NON REFUNDABLE CUSTOM MADE ITEM.**

## [Looking for stock sized double door 1800-1900mm w x 2035 - 2100mm High?](#)

**Note: This is a universal door & the Active leaf (primary opening door) can be alternated by rotating the frame upside down 180°. The Active leaf is secured by handle and/or lock/key set. The passive leaf is secured by internal concealed flush bolts top & bottom which can be accessed after opening the primary leaf. the active leaf has door furniture only ie. handle, keyset, pushpad/bar etc.**



4 x heavy duty hinges that offer extra security

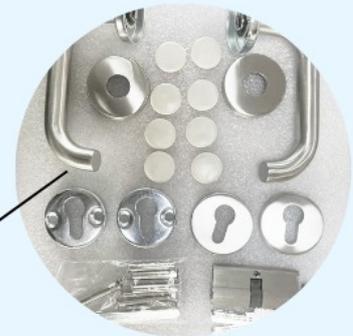

Full set of stainless steel handle & lock



3 sets of keys, single point locking mechanism



Full weather seal to all 4 sides of the frame

**INSTRUCTIONS**

Steel Personnel Pedestrian Door to fit 840mm x 2035mm opening

**THIS IS WHOLESALE .CO.UK**


4pm CUT OFF TIME.  
NEXT DAY DELIVERY.  
10% TRADE DISCOUNT

1




Fit door in the hole hinged in the correct orientation (NOTE door is universal, i.e. can be fitted hinged on the left or right, just rotate 180° to so hinged on the opposite side).

2



Once door is square & firmly in position, using the pre-drilled tabs, mark fixing positions on the building lining/frame & drill using suitable drill bit.


3



Optional: if ordered the extra add on vanity trim (not cover any caps/rods), this can be fitted on the opposite side & secured with suitable adhesive /mastic.


Use anchor bolts or suitable frame fixings to secure in place (washers are advised). NOTE - due to various types of frame being installed into i.e. brick, metal, timber, we are unable to supply the door with fixings.

4




The lock mechanism latch can now be rotated to suit your configuration i.e. hinged left side or hinged right side using a screwdriver as shown.

5



Insert the lock mechanism cassette into the door & secure with the 2 x M5 screws as shown.

6



The lock barrel is fitted with with thumb turn from the inside / key insert to the outside. Handle & cover plate secured with screws as shown.

**UNIVERSALLY  
HINGED LEFT OR  
RIGHT**

Simply rotate the door 180° to hinge on the opposite side. Hinged side you can select at the point of installation depending on the orientation of the install.

## **BOTH IN & OUT POWDER COATING IN 5 DIFFERENT COLOURS**

**RAL 7016 Grey**



**RAL 9003 White**



**RAL 9005 Black**



**RAL 6007 Green**



**RAL 5005 Blue**



**UNIVERSALLY HINGED LEFT OR RIGHT. SIMPLY ROTATE THE DOOR 180° TO HINGE ON THE OPPOSITE SIDE. SIMPLY SELECT OPTIMAL VISION PANEL SIZE TO FIT YOUR REQUIREMENTS AT THE POINT OF INSTALLATION DEPENDING ON THE ORIENTATION OF THE INSTALL.**

**OPTIONAL WINDOW/ LOUVRE VENT**

Steel security door for outdoor/ exterior use - industrial-grade personnel door is the ideal Security Door for Garage, Warehouse, Shed, Industrial Unit, Shipping Container, Farm Barn - can be primed & painted any colour yourself) complete with outer frame, & optional stainless steel door handle & lock with internal thumb turn & 3 sets of keys, single point locking mechanism). **OPTIONAL POWDER COATED COLOURS (AT EXTRA COST)**

- RAL 9003 WHITE (painted both sides in/out)
- RAL 7016 ANTHRACITE GREY (painted both sides in/out)



PLEASE NOTE - THIS IS ONE STANDARD SIZED 2035mm h x 1800mm wide - ITEM IS RECOMMENDED TO BE MEASURED, ORDERED AND INSTALLED BY A SUITABLE EXPERIENCED PROFESSIONAL AS WE DO NOT TAKE ANY LIABILITY FOR INCORRECT MEASUREMENTS. FULL TECHNICAL DRAWING WITH ALL DIMENSIONS IS BELOW & INSTALLATION INSTRUCTIONS.

FOR CUSTOM SIZES, PLEASE SEE OUR SIDE EXPANSION / EXTENSION PANELS THAT COME WITH WIND OUT LUGS ALLOWING EXTENSION OF BOTH SIDES AND HEADER SECTION FROM 10MM - 100MM. THIS MAKING THIS DOOR SUITABLE FOR ALL SIZED APERTURES FROM 1800 - 1900mm WIDTH AND 2035MM TO 2100MM H. FUTHER CUSTOM SIZES MADE ON REQUEST. CONTACT US FOR A QUOTE

Stock Door Size	+ 35mm Side Panel	+ 55mm Side Panel	+ 35mm Header Panel	+ 55mm Header Panel
1800mm x 2035mm	1810mm - 1850mm	1850mm - 1900mm	2035mm - 2070mm	2070mm - 2090mm

Optional Add on 500mm x 300mm Louvre Vent or 400mm x 400mm / 220mm x 1500mm Vision Panels - SELF INSTALLATION / CUTTING REQUIRED (these are supplied with the door only for the customer to install) see instructions below for details. This add on is not pre-installed by ourselves and is only supplied with the door for the customer / installer to fit. Requires a competent and experienced installer, we accept no liability for mis-installation / mis-cutting or damage to product during

installation. Frame powder coated both sides and will be sent the same colour as the door selected. Note: 150mm clearance must be left around all 4 sides of the door.

sales@thisiswholesale.co.uk | https://onlineb2b.co.uk/

**Weight: 135kg**

[DOWNLOAD PDF TECHNICAL DRAWING / DIMENSIONS](#)

**[DOWNLOAD STEEL DOOR INSTALLATION INSTRUCTIONS / MANUAL](#)**

**[DOWNLOAD INSTRUCTIONS MANUAL FOR SIDE/HEADER EXPANSION INFIL PANELS](#)**

[DOWNLOAD VISION GLASS PANEL / LOUVRE VENT INSTRUCTIONS](#)

**[DOWNLOAD FIRE EXIT PUSH PAD/BAR + OUTSIDE ACCESS DEVICE INSTRUCTIONS](#)**

**[DOWNLOAD FIRE EXIT PUSH PAD/BAR + EXTERNAL BLANK INSTRUCTIONS](#)**

**[DOWNLOAD DOOR EXTERNAL BLANK / BLANKING PLATE INSTRUCTIONS](#)**

**[DOWNLOAD COMBINATION CODE HANDLE LOCK INSTALLATION INSTRUCTIONS](#)**

[DOWNLOAD HIGH SECURITY MULTI-POINT LOCKING INC. PAS24 & FIRE RATED STEEL DOOR INSTALLATION INSTRUCTIONS](#)

[DOWNLOAD WC VACANT/ENGAGED CONVERSION KIT INSTALLATION INSTRUCTIONS](#)

**[DOWNLOAD MAINTENANCE MANUAL](#)**

1800mm x 2035mm outer dimensions ie. to fit 1800mm x 2035mm cut out (clear opening 1710mm) - door frame thickness 75mm / door leaf thickness 45mm. - comes pre-hung in frame and fixing points located around the frame for easy install with the correct screws/fixings (not supplied) into brick, timber, steel or other building material. We recommend adding 5-10mm to the external size about for fitting which can be filled with foam / silicone. We would recommend adding a rain drip to any inward opening doors being installed externally helping to prevent water ingress. Frame features knock out weep holes at external footer.

WE STOCK ALL: CONFIGURATIONS OF DOOR OPENING INWARDS OR OUTWARDS, AS VIEWED FROM OUTSIDE- Doors are universal and can be fitted with hinges either on the left or the right hand as viewed from outside by rotating the pre-latch mechanism,- SEE IMAGE FOR FURTHER DETAILS ON CONFIGURATIONS WHEN SELECTING YOUR VARIATION OF DOOR AS INCORRECT ORDERS/RETURNS MUST BE RETURNED AT BUYERS COST. IF IN DOUBT PLEASE ASK.

Door Frame Material	<i>1.5mm Galvanised Steel</i>
Door Frame Thickness	<i>90mm</i>
Door Leaf Material	<i>Double skinned 0.7mm galvanised steel</i>
Door Leaf Thickness	<i>45mm</i>
Door Leaf Core	<i>50mm Mineral Wool Insulation</i>
Actual Door Size	<i>1943mm x 750mm/850mm/950mm</i>
U Value	<i>1.6 w/m<sup>2</sup>k (50mm Mineral Wool Insulation)</i>
Acoustic Value	<i>32dBa</i>

Hinges

**4 Stainless steel hinges**text\_phone 02920 099 098  
sales@thisiswholesale.co.uk | <https://onlineb2b.co.uk/>Lock      *Eurocylinder*  
Cylinder 70mm (35 -  
35)

- *NOTE: due to manufacturing tolerances with regards to batch variation, we recommend ordering all coloured/powder coated doors for a project at the same time, from the same batch as we cannot be held responsible for any variation that occurs between batches.*
- *Must be installed by a competent persons, we are not able to train, teach any DIY enthusiast how to fit a door correctly. Whilst its not a difficult job, each individuals competency and skill set varies and thus professional knowledge is advised to fit this product correctly, safely and securely for normal operation.*
- *Note - door includes mechanical / moving parts such as lock mechanism, hinges, latches and as such requires regular maintenance and upkeep ion the form of regular lubrication/oil applying.*