
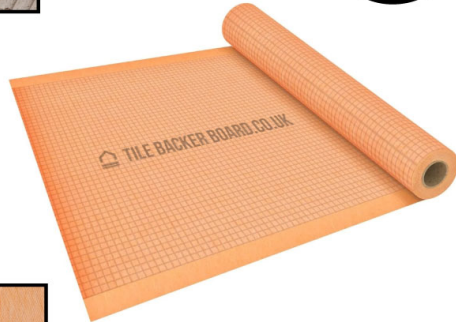
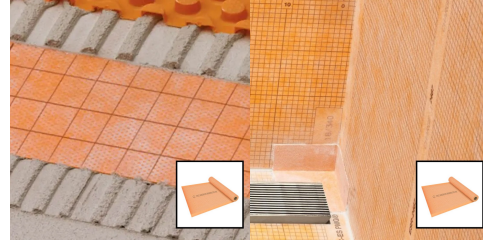


## 30sqm Waterproof Tile Membrane Fleece Roll - Underlay for Wet Room, Shower, Bath, Tanking Fleece Matting Under Tile Bath Shower for Wall & Floor - 1m Wide Underlayment Polyethylene 200

~~£238.80~~ **£149.00**



Waterproof Tile Membrane Fleece Roll - Underlay for Wet Room, Shower, Bath, Tanking Fleece Matting Under Tile Bath Shower for Wall & Floor - 1m Wide Underlayment Polyethylene 200 (5m<sup>2</sup> Roll/10m<sup>2</sup> Roll/20m<sup>2</sup> Roll/30m<sup>2</sup> Roll)

**[Ultimate Moisture Barrier]** For bonded waterproofing assemblies to protect floors and walls in high-moisture areas like bathrooms, kitchens, wet rooms & showers with the Waterproof Fleece Membrane. Ideal for tile, stone, ceramic, and wood surfaces—perfect for both residential and commercial use.

**[Flexible, High-Performance Material]** Crafted from premium-grade polyethylene special fleece webbing to anchor the membrane in suitable tile adhesive, tear-resistant, foldable, and easy to trim with scissors or a blade. Supplied in a 1m wide roll, various lengths and just 2mm thick for seamless integration into any project.

**[High Tensile Strength for Anti-cracking]** Anti-fracture special fleece webbing to anchor the membrane membrane under ceramics, natural stone tiles and LVT and at 0.6mm thickness, 3 times as thick as other industry standard rolls

**[100% Waterproof & Vapour Resistant Barrier]**

Engineered for reliable waterproofing and vapour control in showers, bathrooms, and steam rooms. This membrane stops moisture penetration, helps prevent tile cracks, and ensures long-term protection beneath your surfaces especially on for moisture-sensitive substrates such as wood, plasterboard and gypsum plaster.

**[Simple Installation on both Wall & Floor]** Featuring polypropylene fleece on both sides for optimal mortar adhesion, this membrane installs easily embedded in a tile adhesive. Features imprinted gridlines on one side for easier cutting. In addition to indicating how much material is left, the imprint also shows the minimum overlap width of 5 cm for working with multiple membrane sheets. Simple to cut, shape, and fit around curves or complex layouts—ideal for professionals and DIYers alike.

•

Specification	
Description	polyethylene(PE) film; polypropylene(PP) nonwoven
Weight	300g/sqm
Roll size	1m x 5m □ 1m x 10m □ 1m x 20m, 1 x 30m
Thickness	0.6mm
Colour	Orange
Breaking strength	500psi

*NOTE - if you order multiple rolls, ie. 2 x 5m, you may be sent a single 10m roll due to stock. Rest assured your getting the same meterage paid for.*